



Enhanced capacitive touch button

Contents

[Safety and usage cautions](#)

[Call touch buttons](#)

[Service touch buttons](#)



Safety and usage cautions

Before installing our products, we recommend you to consult the section about safety and usage cautions at the link below.




- ❗ Do not touch the control panel using wet hands or other wet body parts.
Do not install the control panel in a humid environment and/or in direct sunlight.
Unintentional activations may happen in the following cases:
 - *During the cleaning phase.*
 - *If the control panel is not completely dry.***The protective film must be removed before powering the control panel.**

Call touch buttons



– Datasheet –

Contacts	1 contact (with or without beep)
Power supply	24 Vdc \pm 10% (Not Rectified current!) Optional power supply EWS.AL224 to supply power up to 20 components (push-buttons or signalations)
Maximum absorption	20 mA / 24Vdc
CE certification	Electromagnetic compatibility: directive 2014-30-EU – EN 120125:2014 and EN 12016:2013 REACH: directive 2011-65-EU
Operating temperature	-5 / +50 °C

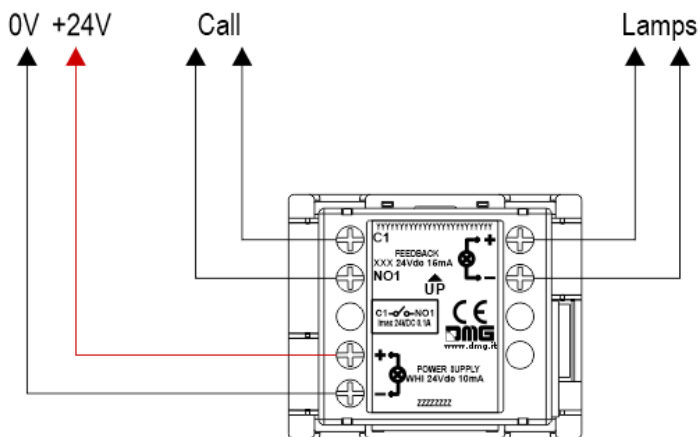

A) – Optional power supply (strongly recommended)


Service touch buttons



– Datasheet –

Contacts	2 contacts
Power supply	24 Vdc \pm 10% (Not Rectified current!)

	Optional power supply EWS.AL224 to supply power up to 20 components (push-buttons or signalation)
Maximum absorption	20 mA / 24Vdc
CE certification	Electromagnetic compatibility: directive 2014-30-EU – EN 120125:2014 and EN 12016:2013 REACH: directive 2011-65-EU
Operating temperature	-5 / +50 °C

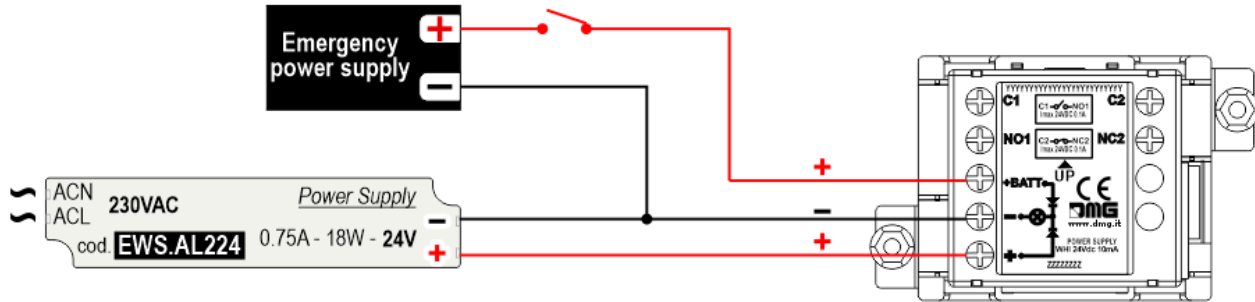

Updated on 15 Marzo 2021